


# Commercial Grade Dispensable Epoxy Absorber



## MATERIAL

Magnetic epoxy resin

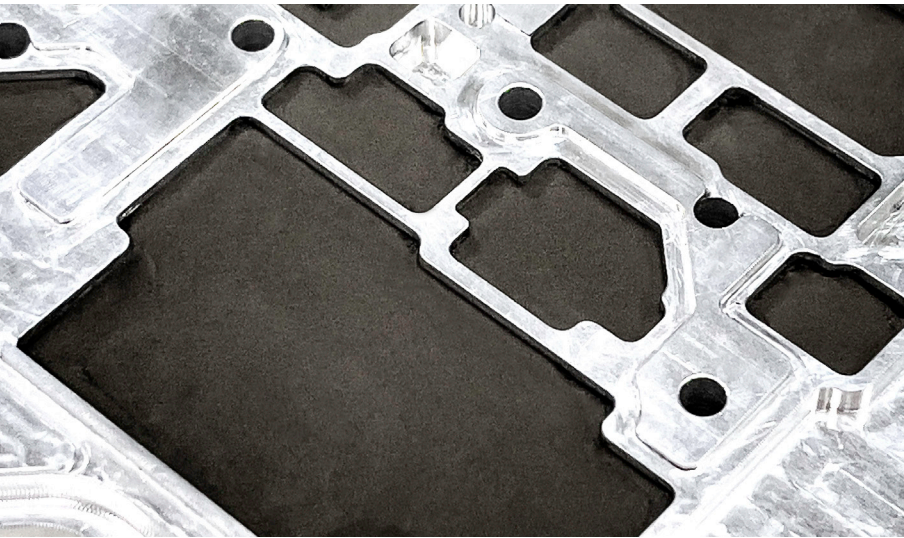


## FEATURES

- Reduces RF signals, suppresses standing waves and RF noise
- Adheres well to metal surfaces, no need for die-cutting or tape
- Electrically equivalent to cavity resonance sheet absorber products


PROPERTIES	CR-DE-2
Color	Dark Grey
Density	3.11 g/cm <sup>3</sup>
Softness	65 Shore A
Operating Temperature	-55 to 125 °C

PROPERTIES	CR-DE-2
Flammability Rating	UL 94 HB
Minimum Thickness	0.5 mm
Outgassing	Data Pending


### Permittivity and Permeability

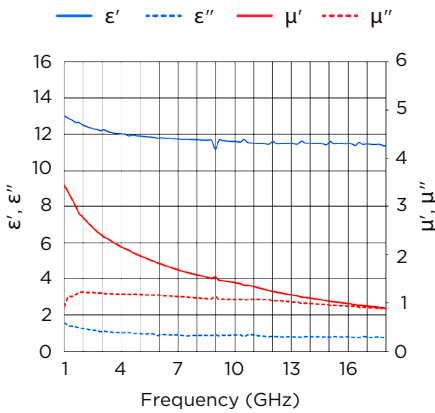

### Attenuation

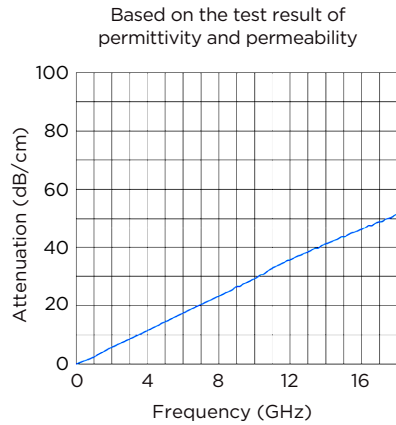

### Cavity Resonance

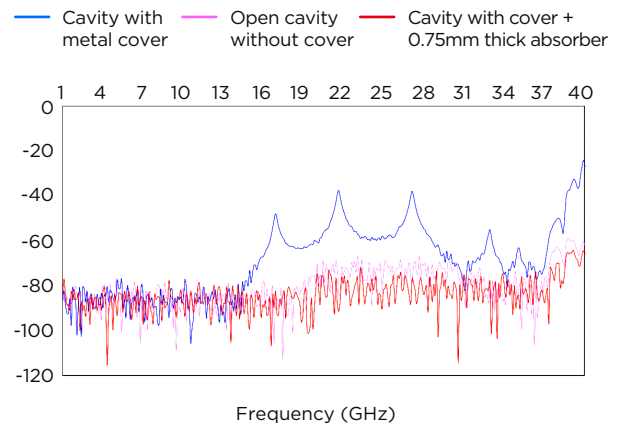

## GET IN TOUCH

EMAIL: [SUPPORT@TENNMAX.COM](mailto:SUPPORT@TENNMAX.COM)

TEL: +1 360-567-0707



TENNMAX.COM